CORRECTED VERSION

(19) World Intellectual Property Organization

International Bureau



1 (1811 - 1811) | 1811) | 1811 | 1811 | 1811) | 1811 | 1812 | 1813 | 1814 | 1814 | 1814 | 1814 | 1814 | 1814 |

(43) International Publication Date 13 January 2005 (13.01.2005)

PCT

(10) International Publication Number WO 2005/002328 A1

(51) International Patent Classification⁷: A01K 1/035

PCT/DK2004/000473

(22) International Filing Date: 2 July 2004 (02.07.2004)

(25) Filing Language: Danish

(26) Publication Language: **English**


(30) Priority Data: PA 2003 01025

(21) International Application Number:

4 July 2003 (04.07.2003)

- (71) Applicant (for all designated States except US): KVM INDUSTRIMASKINER A/S [DK/DK]; Industrivej 22, DK-8620 Kjellerup (DK).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): RASMUSSEN, Jesper, B. [DK/DK]; Skovbakkevej 13, DK-8220 Brabrand (DK). SPANGENBERG, Erik [DK/DK]; Kollerupvej 11, Torp, DK-8752 Ostbirk (DK).

- (74) Agent: PATRADE A/S; Fredens Torv 3A, DK-8000 Århus C (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

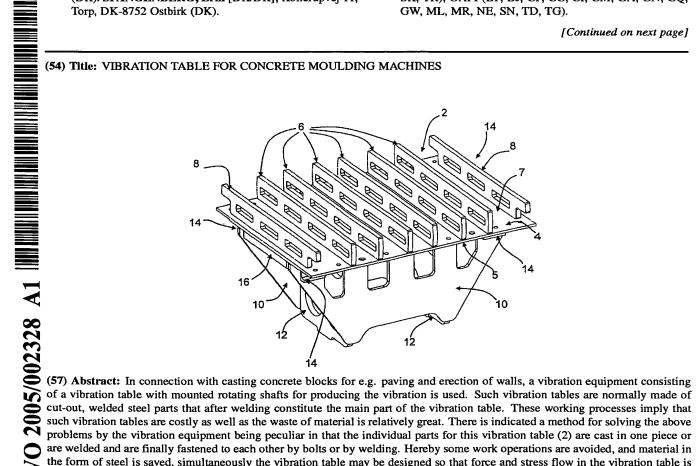

are welded and are finally fastened to each other by bolts or by welding. Hereby some work operations are avoided, and material in the form of steel is saved, simultaneously the vibration table may be designed so that force and stress flow in the vibration table is optimised.



WO 2005/002328 A1



Published:

- with international search report
- (48) Date of publication of this corrected version:

24 February 2005

(15) Information about Correction: see PCT Gazette No. 08/2005 of 24 February 2005, Section II For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.